


MartinLogan Motion 2i

Monitorluidsprekers

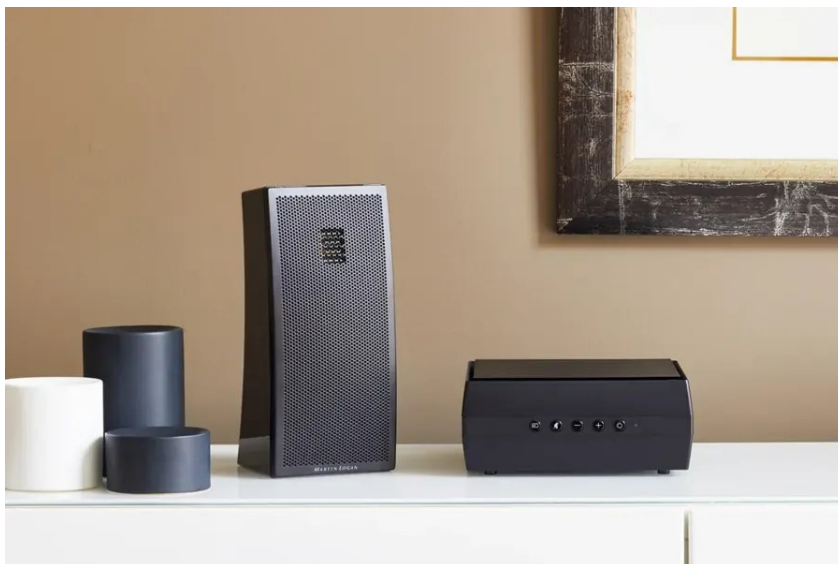

Technische specificaties

Merk	MartinLogan
Model	Motion 2i
Productcategorie	Monitorluidsprekers
Frequentiebereik	110-23,000 Hz $\pm$ 3dB
Impedantie	6 Ω Compatible with 4, 6, or 8 Ohm rated amplifiers.
Gevoeligheid	86 dB/2.83 volts/ meter
Luidsprekerbezetting	Custom air core coil and low DCR steel laminate inductors. Polyester film capacitors in series and low DF electrolytic capacitors in parallel. Overall system thermal/current protection.
Ingangen	Push style with banana jacks
Aanbevolen versterkervermogen	20-100 W per kanaal
Horizontale afstraling	80°
Verticale afstraling	80°

Technische specificaties

Scheidingsfrequentie	3,800 Hz
Hogetonenunit	0.94" × 1" (2.4cm × 2.5cm) Folded Motion Transducer with 2.8" × 1.25" (13.3cm × 4.4cm) diaphragm
Lagetonenunit	3.5" (8.9cm) poly cone with stamped steel basket. Non-resonant asymmetrical chamber format. Rigid structured dust cap to reduce cone break-up modes. Sealed.
Afmetingen	10" x 4.7" x 4.6 " (25.5cm x 11.8cm x 11.7cm)
Gewicht	3.4 lbs. (1.54 kg)